



PETERSON
VEHICLE SAFETY LIGHTING

LED FORWARD LIGHTING

LED WORK LIGHTS



TABLE OF CONTENTS

LED HEADLIGHTS

Round.....	This Page
Rectangular Dual.....	1
Rectangular Quad.....	1

LED WORK LIGHTS


4" Round Grommet/Flange.....	2
Par 36 Replacement.....	2
Pedestal Mount.....	3-8
Swivel Mount.....	7
Magnetic Mount.....	8
Light Bars.....	Inside Back Cover

WHAT'S INSIDE:

- Complete details, including mounting, wiring, intensity and beam pattern specifications.
- Quick-reference icons, to help you understand the PM LED work light range and choose the right light for your application.
- Photometric diagrams (select lights only). Demonstrates how the beam pattern illuminates flat ground from a standard mounting height.



**7 INCH
ROUND**



**RETAIL
TWIN PACK
V701KC-2**



Kit includes two 701C headlights & two 701-491 anti-flicker harnesses.



701C Great White® LED 7" PAR 56 Headlight



- 1100/1650 lumen output (low/high beam).
- Wider, more even pattern than halogen bulbs.
- Designed to last many times longer than a traditional sealed beam.
- Multivolt design is compatible with both 12V and 24V systems.
- Low power consumption — draws only 0.7-1.9 amps.
- DOT-legal; exceeds FMVSS-108 and CMVSS-108 requirements.
- Meets applicable SAE standards.
- Drop-in LED replacement for all PAR56 7-inch standard headlights, including popular H6014, H5024 and H6024 halogen sealed beams.
- 5400k ~ 6400k color temperature closely matches natural daylight.
- UV- and impact-resistant, hard-coated polycarbonate lens
- Standard H4 3-blade terminals integrated directly into the heavy-duty cast alloy rear housing.
- Requires 701-491 anti-flicker harness for use on CANBUS-equipped vehicles, including '07 and newer Jeep Wrangler.
- Does not function as a daytime running light (DRL).
- Patent pending.
- IP66 ingress rating.
- Assembled in USA.



Part Number	Description	Box Type	Quantity
V701C	LED 7" PAR56 repl.	full-color retail box	1
V701KC-2	LED 7" PAR56 Twin Pack	full-color retail box	2*
701C	LED 7" PAR56 repl.	black box	1
M701C	LED 7" PAR56 repl.	mfg. pack	4
701-491	anti-flicker harness	poly pack	1

*ECE left-hand traffic version also available. See PM Master Catalog.
two kits of two lights each per master carton

LED HEADLIGHTS

702C/703C Great White® LED Rectangular Quad Headlights



- 702C is an SAE Type 2A1 low beam.
- 703C is an SAE Type 1A1 high beam.
- Greater vibration & shock resistance for longest available service life.
- Multivolt design is compatible with both 12V and 24V systems.
- Heavy-duty cast alloy housing.
- UV & impact resistant, hard-coated polycarbonate lens.
- Vacuum metallized reflector.
- 700 (702C) & 1000 (703C) source lumens.
- Low power draw: 10.25 watts (702C) & 17 watts (703C).
- DOT-legal; exceeds FMVSS-108 and CMVSS-108 requirements.
- 5200k ~ 6000k (702C) & 5200k ~ 6300k (703C) color temperature.
- Hardwired w/ standard H4 connector.
- IP67 ingress rating.

**Physical configuration and electrical compatibility does not guarantee legal compliance in OE or retrofit applications. Refer to vehicle manufacturers' specifications and aiming standards. The 702C low-beam function headlight is designed only for use as part of a four-lamp integrated system of the type shown above. It is not designed or sold as a replacement for a dual function (high/low beam) headlight*



Order No.	Description	Pack	Std Carton
V702C	4"x6" low beam	full-color retail box	2
V703C	4"x6" high beam	full-color retail box	2
702C	4"x6" low beam	box	1
703C	4"x6" high beam	box	1

4/6
diodes


HARD
WIRED

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated



4"x6"
Quad



705C Great White® LED Rectangular Headlights



- SAE Type 2B1 lamp (one rectangular high-low beam lamp per side)
- 800/1600 lumen output (low/high beam).
- Wider, more even pattern than halogen bulbs.
- Designed to last many times longer than a traditional sealed beam.
- Multivolt design is compatible with both 12V and 24V systems.
- Low power consumption — draws only 0.51–2.23 amps.
- DOT-legal; exceeds FMVSS-108 and CMVSS-108 requirements.
- Meets applicable SAE standards.
- 5200k ~ 6000k color temperature.
- Heavy-duty black polycarbonate housing.
- UV- and impact-resistant, hard-coated polycarbonate lens.
- -30° C to 50° C (-22° F to 122° F) operating temperature range.
- Hardwired w/ standard H4 3-blade connector.
- IP67 ingress rating.



Order No.	Description	Pack	Std Carton
V705C	5"x7" high & low beam	full-color retail box	2
705C	5"x7" high & low beam	box	1

4
diodes


HARD
WIRED

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated



5"x7"





9
diodes

LumenX

MV
Multi-Volt
12V & 24V


REG
Voltage
Regulated

817-9 LumenX® LED 4" Round Work Light

- New white diodes behind clear lens.
- Available in 450 lumen & 800 lumen versions.
- Advanced optics fully illuminate lens.
- Flood pattern for broad illumination.
- Also suitable for dome or utility light.
- Regulated design provides voltage protection and consistent light output over entire voltage range.
- Skirted weld joint provides added protection against road and weather conditions.
- 817 series has 9–32 volt operating range. 800 series is compatible with 12 volt systems only.
- 800 series draws 0.65A @ 14V.
- 817/818 series draws 0.29A @ 12V, 0.22A @ 24V.
- M800W-9 & M817W-9 require grommet or surface-mount bracket.
- M800WF-9 M818W-9 are equipped with integral mounting flange.
- Assembled in USA.



Order No.	Description	Pack	Std Carton
M800W-9	grommet mnt, 800 lumen, 12V	mfg. pack	50
M800WF-9	flange mnt, 800 lumen, 12V	mfg. pack	50
M817W-9	grommet mnt, 450 lumen, MV	mfg. pack	50
M818W-9	flange mount, 450 lumen, MV	mfg. pack	50
417-1	surface mount bracket	mfg. pack	40
B426-18	rubber grommet	mfg. pack	100
B417-48	plug	mfg. pack	100



6
diodes


VIZ
PACK

MV
Multi-Volt
12V & 24V

711 Great White® LED PAR 36 LED Replacement Beam



- High-output Great White® diodes for a bright general illumination.
- Fits all standard Par 36 incandescent sealed beam applications.
- Impact-resistant polycarbonate lens.
- Cast aluminum body with matte black finish.
- Compatible with both 12 and 24-volt systems.
- Self-service visual packaging.





Order No.	Description	Pack	Std Carton
V711	round	Viz-Pack	6
711	round	mfg	20

901 Great White® LED 2" Round Mini Work Light



- High-output single white diode for a bright, narrow spot beam pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9-48 VDC operating range.
- Reverse voltage protection.
- Draws 1.3A @ 12V, 0.65 @ 24V.
- 2-Conductor black PVC jacketed harness 20 GA GPT.
- IP68 rated.
- Stainless steel mounting hardware.
- EMC certified.

Order No.	Description	Pack	Std Carton
V901-MV	round	Viz-Pack	4
901-MV	round	box	1





902 Great White® LED 2" x 2" Square Mini Work Light



- High-output single white diode for a bright, narrow spot beam pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Removable bracket fits mounting slots on all four sides.
- Multiple 902 lights can be gang-mounted using included hardware.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9-48 VDC operating range.
- Reverse voltage protection.
- Draws 1.3A @ 12V, 0.65A @ 24V.
- 2-Conductor black PVC jacketed harness 20 GA GPT.
- IP68 rated.
- Stainless steel mounting hardware.

Order No.	Description	Pack	Std Carton
V902-MV	square	Viz-Pack	4
902-MV	square	box	1





Includes hardware to gang-mount multiple 902 lights

903 Great White® LED 3" x 5" Rectangular Work Light





- High-output Great White® diodes for a bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9-32 VDC operating range.
- Reverse voltage protection.
- Draws 2.65A @ 12V, 1.0A @ 24V.
- 2-Conductor black PVC jacketed harness.
- IP67 rated.
- Stainless steel mounting hardware.
- Certified to ECE Reg 10.

Order No.	Description	Pack	Std Carton
903-MV	rectangular	box	1





750 Lumens



4
diodes

VIZ
PACK

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

904 Great White® LED 3" x 3" Square Work Light




- High-output Great White® diodes for a bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9–36 VDC operating range.
- Reverse voltage protection.
- Draws 0.98A @ 12V, 0.43A @ 24V.
- 2-Conductor black PVC jacketed harness 20 GA GPT.
- Operating temperature: -40° – +65° C.
- Color temperature: 6300k.
- Certified to ECE Reg 10.
- IP67 rated.
- Stainless steel mounting hardware.

Order No.	Description	Pack	Std Carton
V904-MV	square	Viz-Pack	4
904-MV	square	box	1
904-MV-BT2	square, .180 bullets	box	1



450 or 800 Lumens



9
diodes

VIZ
PACK

LumenX

MV
Multi-Volt
12V & 24V


907/908 LumenX® LED 4" Round Work Light

- Extremely even, flood pattern for broad illumination.
- Also suitable for use as a utility light.
- Sealed LED work light installed in rubber housing with lead wires.
- AMP-compatible receptacle provides the most reliable connection available.
- 907-MV has 9–32 volt operating range. 908 is compatible with 12 volt systems only.
- 908 draws 0.65A @ 14V.
- 907-MV draws 0.29A @ 12V, 0.22A @ 24V.
- Assembled in USA.

Order No.	Description	Pack	Std Carton
V908	rubber housing, 800 lumen, 12V	Viz Pack	6
M907-MV	rubber housing, 450 lumen, MV	mfg. pack	24
M908	rubber housing, 800 lumen, 12V	mfg. pack	24



1900 Lumens



6
diodes


MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

909-MV LED Pedestal-Mount Work Light



- Flood beam pattern.
- Die-cast aluminum housing with matte black finish.
- Polycarbonate lens.
- High vibration resistance and low amp draw
- Stainless steel mounting hardware.
- 11-70 VDC operating range.
- 2 amp current draw at 12.8 VDC; 0.9 amp @ 25.6VDC.
- Certified to ECE Reg 10.



Order No.	Description	Pack	Std Carton
909-MV	square	box	1

910 LED Pedestal-Mount Work Light



- High-output Great White® diodes for a bright, even, flood pattern.
- Die-cast aluminum body with heat-dissipating fins for durability and longevity.
- High vibration resistance.
- 9–32 volt operating range.
- Draws 1.2A @ 13.5V, 0.59A @ 28V.
- Operating temperature: -40° – +65° C.
- Comes complete with stainless steel mounting hardware.
- IP67/IP69K Rated.
- RoHS compliant.
- Certified to ECE Reg 10.


9
diodes

VIZ
PACK

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

1350
Lumens

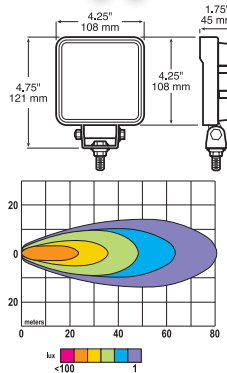

Order No.	Description	Pack	Std Carton
V910-MV	square	Viz-Pack	4
910-MV	square	box	1
910-MV-PKD	w/ hardshell connector	box	1

911 LED Pedestal-Mount Work Light



- High-output Great White® diodes for a bright, even, round pattern.
- Cast aluminum body with heat-dissipating fins for durability and longevity.
- High vibration resistance.
- 9–32 volt operating range.
- Draws 1.65A @ 12.8V, 0.78A @ 28V.
- Comes complete with stainless steel mounting hardware.


6
diodes

VIZ
PACK

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

1000
Lumens

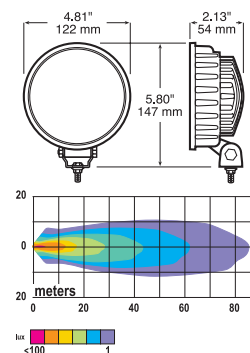

Order No.	Description	Pack	Std Carton
V911-MV	round	Viz Pack	6
911-MV	round	box	1
911-MV-PKD	w/ hardshell connector	box	1

912 Great White® LED 3" Round Work Light



- High-output Great White® diodes for a bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 9–32 VDC operating range is compatible with 12 and 24-volt systems.
- Reverse voltage protection.
- Draws 1.11A @ 12V, 0.61A @ 24V.
- 2-Conductor black PVC jacketed harness 18 GA GPT.
- Operating temperature: -40° – +65° C.
- Color temperature: 6500k.
- IP67 rated.
- Stainless steel mounting hardware.


4
diodes

VIZ
PACK

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated


900
Lumens

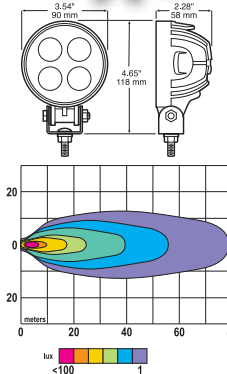

Order No.	Description	Pack	Std Carton
V912-MV	round	Viz Pack	4
912-MV	round	box	1



900 Lumens

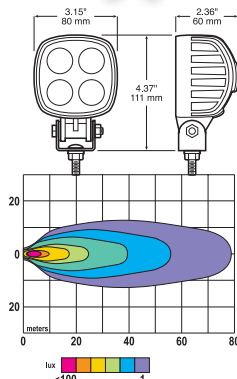

4
diodes

VIZ
PACK

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

913 Great White® LED 3" x 3" Compact Work Light




- High-output Great White® diodes for a bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 9-32 VDC operating range is compatible with 12 and 24-volt systems.
- Reverse voltage protection.
- Draws 1.3A @ 12V, 0.65A @ 24V.
- 2-Conductor black PVC jacketed harness 18 GA GPT.
- Operating temperature: -40° – +65° C.
- Color temperature: 6500k.
- Certified to ECE Reg 10.
- IP67 rated.
- Stainless steel mounting hardware.

Order No.	Description	Pack	Std Carton
V913-MV	square	Viz-Pack	4
913-MV	square	box	1



1800 Lumens



12
diodes

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

914S Great White® LED 4" x 5" Work Light w/ Switch




- High-output Great White® diodes for a bright, even flood pattern.
- Weather-sealed, integrated push-on/push-off switch.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 10-33 VDC operating range is compatible with 12 & 24-volt systems.
- Reverse voltage protection.
- Draws 1.6A @ 12V, 0.8A @ 24V.
- 2-Conductor black PVC jacketed harness 20 GA GPT.
- Color temperature: 6000k.
- CE Certified
- IP67 rated.
- Stainless steel mounting hardware.
- EMC certified.

Order No.	Description	Pack	Std Carton
914S-MV	rectangular w/ switch	box	1



3600 Lumens



24
diodes

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

915 Great White® LED 5" x 7" Rectangular Work Light



- High-output Great White® diodes for a bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 10-33 VDC operating range is compatible with 12 & 24-volt systems.
- Reverse voltage protection.
- Draws 3.2A @ 12V, 1.6A @ 24V.
- 2-Conductor black PVC jacketed harness.
- Color temperature: 6000k.
- CE Certified
- IP67 Rated.
- Stainless steel mounting hardware.
- EMC certified.

Order No.	Description	Pack	Std Carton
915-MV	rectangular	box	1

916/918 LumenX® LED Swiveling Work Light

- 916S features 817W-9 light, 918S features 800W-9 light
- Rugged, cast aluminum housing.
- Mounting arm features two separate 360° swivel joints that allow light to be pointed in any direction.
- High vibration resistance.
- 918S draws 0.65A @ 14V.
- 916S draws 0.29A @ 12V, 0.22A @ 24V.
- Durable, attractive gray powder-coat finish.
- Convenient push-button switch.
- Two lead wires.
- Assembled in USA.


9
diodes

LumenX

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

**450 or 800
Lumens**



Order No.	Description	Pack	Std Carton
916S	450 lumen, multi-volt	box	1
918S	800 lumen, 12V	box	1

917 Great White® LED 4" x 4" Square Work Light





- High-output Great White® diodes for a bright, even spot pattern.
- Armored glass lens.
- Die-cast aluminum body with matte black finish.
- Shock-resistant mounting pads.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9-40 VDC operating range.
- Reverse voltage protection.
- Draws 2.35A @ 12V.
- 2-Conductor black PVC jacketed harness.
- Color temperature: 6500k.
- IP68 Rated.
- Stainless steel mounting hardware.
- EMC certified.

4
diodes

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

**2800
Lumens**



Order No.	Description	Pack	Std Carton
917-MV	square	box	1

918 Great White® LED 3" x 3" Square Work Light





- High-output Great White® diodes for a bright, even flood pattern.
- 10-30 VDC operating range.
- Draws 2.15A @ 12V, 1.03A @ 24V.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Operating temperature: -30° – +50° C.
- Stainless steel mounting hardware.
- IP67 and IP69K Rated.
- RoHS compliant.
- Certified to ECE Reg 10.

6
diodes

MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

**2520
Lumens**



Order No.	Description	Pack	Std Carton
918-MV	square	box	1



1900 Lumens

10 diodes


VIZ PACK

MV Multi-Volt 12V & 24V

REG Voltage Regulated




Head Mounts Vertically or Horizontally



919 Great White® LED 3.25" x 4.75" Work Light



- High-output Great White® diodes for a bright, even, wide spot pattern.
- Die-cast aluminum body with matte black finish.
- Swiveling head can be mounted horizontally or vertically.
- 10–40 VDC operating range is compatible with 12 & 24-volt systems.
- Operating temperature: -30° – +50° C.
- Operating current: 1.64A @ 12VDC, 0.83A @ 24VDC.
- Stainless steel mounting hardware.
- RoHS compliant.
- IP67 / IP69K rated.
- Certified to ECE Reg 10.



Order No.	Description	Pack	Std Carton
V919-MV	oval	Viz Pack	5
919-MV	oval	box	1



Perfect for FORK LIFTS


2 diodes

MV Multi-Volt 12V & 24V



920B-MV Great White® LED Blue Pedestrian Warning Light

- Two 5 watt blue diodes for a bright spot pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Operating voltage: 12-48V DC
- Operating current: 0.6A @ 12.8VDC, 0.3A @ 28VDC.
- PVC jacketed, (partially stripped, 17.75" (450mm) lead wires.
- Operating temperature range: -40°F - +149°F (-40°C - +65°C).
- IP67 rated.
- Stainless steel mounting hardware.



Order No.	Description	Pack	Std Carton
920B-MV	blue, oval	box	1



400 Lumens

5 diodes

MV Multi-Volt 12V & 24V


REG Voltage Regulated

magnetic



4547 Great White® LED Magnetic-Mount Work Light

- Die-cast aluminum housing with matte black finish.
- Polycarbonate lens.
- 12' coil cord.
- Integrated on/off toggle switch with rubber boot seal.
- Stainless steel mounting hardware.
- Magnetic-mount base with pivot bracket and lock washer.
- 9–32 VDC operating range.
- 1.02 amp current draw at 13.5 VDC.
- For interior/warehouse use only.
- Perfect for forklift applications.



Order No.	Description	Pack	Std Carton
4547	magnetic mount	box	1

LED WORK LIGHTS

930 Great White® LED 39" Rectangular Light Bar



- Rugged, extruded aluminum housing with die-cast end caps.
- Thick, scratch-resistant polycarbonate lens.
- Powder-coated black finish.
- Infinitely adjustable mounting pedestal locations.
- Flood beam pattern.
- 6000K–6500K daylight color temperature.
- 10–30 volt operating range.
- Draws 15A @ 13.5V, 6.6A @ 28V.
- IP66 ingress protection rating.
- Includes all mounting hardware.
- 18" sheathed leads.
- Includes 20 amp ATC fuse and fuse holder, plus butt connectors for easy wiring.

84
diodes


MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

**HARD
WIRED**



**DOUBLE
ROW**



Order No.	Description	Pack	Std Carton
930-MV	double row flood	box	1

931 Great White® LED 39" Rectangular Light Bar



- Rugged, extruded aluminum housing with die-cast end caps.
- Thick, scratch-resistant polycarbonate lens.
- Powder-coated black finish.
- Infinitely adjustable mounting pedestal locations.
- 60° flood beam pattern.
- 6000K–6500K daylight color temperature.
- 10–30 volt operating range.
- Draws 11.6A @ 13.5V, 5.2A @ 28V.
- IP66 ingress protection rating.
- Includes all mounting hardware.
- 18" sheathed leads with Deutsch style connector (DT04-2P).
- Remove connector plug for custom termination option.

38
diodes


MV
Multi-Volt
12V & 24V

REG
Voltage
Regulated

**HARD
WIRED**



**SINGLE
ROW**




Order No.	Description	Pack	Std Carton
931-MV	single row flood	box	1

INTERNATIONAL IP (Ingress Protection) RATINGS EXPLAINED

1st Digit	Protection Level Against Solid Ingress
0	Non-protected (or not rated)
1	> 50 mm gap for entry
2	> 12 mm gap for entry
3	> 2.5 mm gap for entry
4	> 1.0 mm gap for entry
5	Dust resistant
6	Dust tight

Example: IP67 = [6] dust tight + [7] immersible up to 1 meter for 30 minutes

2nd Digit	Protection Level Against Liquid Ingress
0	Non-protected (or not rated)
1	Vertically dripping water
2	Dripping water tilted at 15 degrees
3	Spraying water at an angle of 60 degrees
4	Splashing water at any direction
5	Jets of water from any direction
6	Heavy seas or powerful jets of water
6K	Powerful water jets with increased pressure
7	Harmful ingress of water when immersed to 1 meter for 30 min.
8	Continuous immersion in water
9K	Powerful high temperature water jets

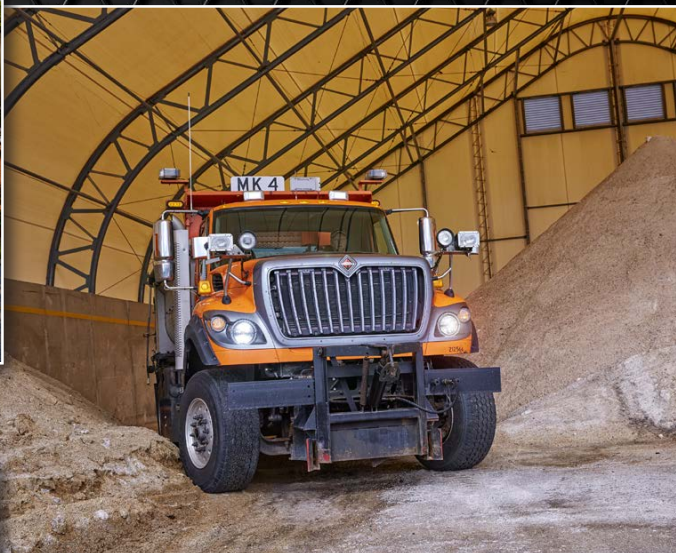

PETERSON

4200 East 135th Street • Grandview, MO 64030

Phone (816) 765-2000 • Fax (816) 761-6693

E-mail pmco@pmlights.com www.pmlights.com

Form PM-SB-WL18-Z